




# 1700 RAISED FLOOR TILES

The **AXIL Access floor panel** is an epoxy coated unitized hollow shell consisting of a flat steel top sheet welded to a formed steel bottom sheet filled with a highly controlled mixture of lightweight cement.

Manufactured to exacting tolerances, these non-combustible rigid, solid panels deliver the ultimate in strength and durability with the convenience of lightweight construction.

## APPLICATIONS:

- Computer Rooms
- Control Rooms
- Offices

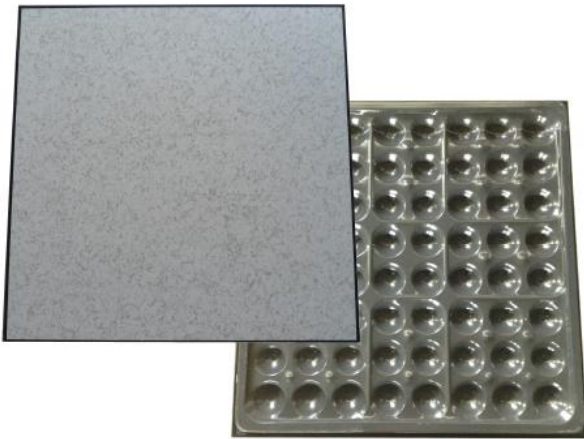

**Size: 600×600×35(mm)**

**Wide Range Finishes Available** ✓  
**High Pressure Laminate** ✓  
**Conductive vinyl tile** ✓  
**Ceramic tile** ✓  
**Carpet tile** ✓  
**Vinyl tile** ✓

## Performance Chart

The System Performance Criteria are the most important to consider because they represent the performance in a typical installation.

Covered with HPL colour:	Grey fleck on white, with black printed trim.
Concentrated load:	4440 N or 453 kg
Impact load:	670 N
Ultimate load:	16 900 N
Uniform load:	11 970 N
Rolling load:	10 passes 4450 - 10 000 passes 3560

This tile will suit most 600x600mm floor substructures